


	mm	mm	MPM
LONG HAUL	245	16.5	4.50
REGIONAL	255	16.5	4.80
ON/OFF	265	16.5	5.10
OFF ROAD			
LIGHT TRUCK			

**DRIVE**


## M100



	mm	mm	MPM
LONG HAUL	235	15	4.16
REGIONAL	245	15	4.46
ON/OFF	255	15	4.76
OFF ROAD			
LIGHT TRUCK			

**ALL POSITION**


## M101



	mm	mm	MPM
LONG HAUL	225	15	4.00
REGIONAL	235	15	4.30
ON/OFF	245	15	4.60
OFF ROAD	255	15	4.90
LIGHT TRUCK			

**ALL POSITION**


## M102



	mm	mm	MPM
LONG HAUL	230	14	3.37
REGIONAL	240	14	3.54
ON/OFF	250	14	3.58
OFF ROAD			
LIGHT TRUCK			

**ALL POSITION**

## M103



	mm	mm	MPM
LONG HAUL	220	15	3.70
REGIONAL	230	15	4.00
ON/OFF	240	15	4.30
OFF ROAD	250	15	4.60
LIGHT TRUCK			

**DRIVE**


## M104



	mm	mm	MPM
LONG HAUL	220	14	3.05
REGIONAL	230	14	3.35
ON/OFF	240	14	3.65
OFF ROAD			
LIGHT TRUCK			

**ALL POSITION**

## M105




## YOUR GO-TO ECONOMIC SOLUTION

When it comes to durability and value, there's only one choice: Leader Tread. Our economic range is meticulously engineered with a lighter compound and robust designs, guaranteeing top-notch performance without compromising on affordability. Whether you're tackling city streets or conquering the open road, Leader Tread delivers the reliability and cost-effectiveness your business craves.

With Leader Tread, you can trust that every mile driven is backed by superior quality and unbeatable value. Why settle for less when you can lead the way with Leader Tread?

For more information on how Leader Tread can elevate your business, contact us today. Let's pave the path to success together with Leader Tread.

	mm	mm	MPM
LONG HAUL	190	14	2.85
REGIONAL	200	14	2.78
ON/OFF	220	14	3.54
	230	14	3.92
OFF ROAD	240	14	4.10
	250	14	4.35
	260	14	4.40
LIGHT TRUCK	270	14	5.50
	280	14	5.10

**TRAILER I-H**


## M3



	mm	mm	MPM
LONG HAUL	210	16	3.77
REGIONAL	220	16	4.30
ON/OFF	230	16	4.61
	240	16	4.66
OFF ROAD	250	16	4.88
	260	16	4.99
LIGHT TRUCK	270	16	5.20

**ALL POSITION I-H**


## M38



	mm	mm	MPM
LONG HAUL	295W	14.5	5.80
REGIONAL			
ON/OFF			
OFF ROAD			
LIGHT TRUCK			

**TRAILER I-H**


## M68



	mm	mm	MPM
LONG HAUL	295W	16	4.97
REGIONAL			
ON/OFF			
OFF ROAD			
LIGHT TRUCK			

**TRAILER I-H**


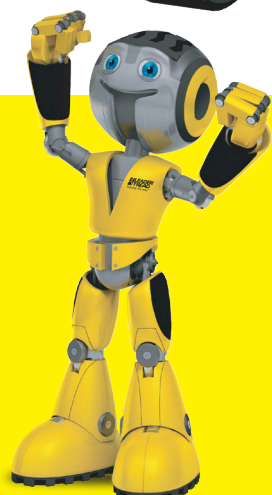
## M78



	mm	mm	MPM
LONG HAUL	225	15	4.00
REGIONAL	235	15	4.30
ON/OFF	245	15	4.53
	255	15	4.61
OFF ROAD	265	15	4.78
	275	15	4.98
LIGHT TRUCK			

**ALL POSITION I-H**

## M90L

## MASS PER METER

DATE: 01/06/2024

Weights are subject to ±2% tolerance and may change. The average weight may vary from time to time. LRC reserves its right to adjust the weights. (Use as guidelines only)  
Errors and omissions excepted (E&OE)